
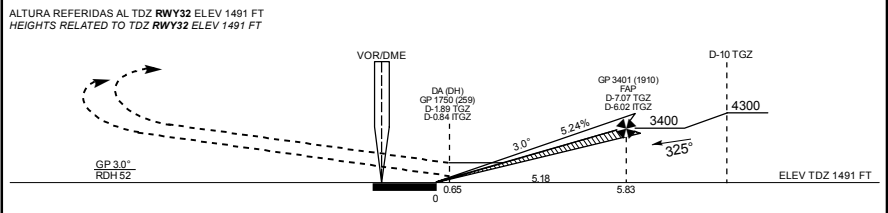


TA: 18500 FT

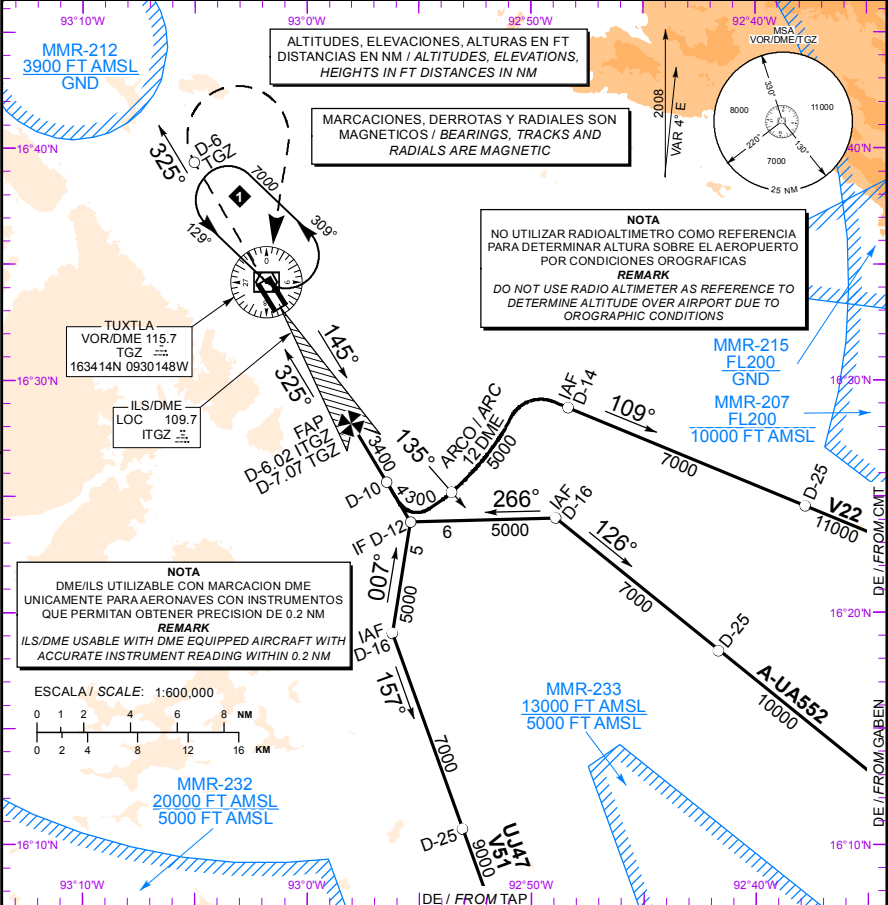

APROXIMACION FRUSTRADA / MISSED APPROACH

ASCIENDA EN RADIAL 325° HASTA D-6. EFECTUE VIRAJE DE GOTTA A LA DERECHA DENTRO DE 9 NM HACIA EL VOR/DME/TGZ HASTA LA ALTITUD MINIMA DE ESPERA.

CLIMB VIA TGZ VOR R-325° TO D-6 TGZ. THEN TURN RIGHT WITHIN 9 NM TO VOR/DME/TGZ AT THE MINIMUM HOLDING ALTITUDE.

GRADIENTE DE DESCENSO / RATE OF DESCENT									
FAP - THR	VEL GS (KTS)	80	100	120	140	160	180	200	
5.83 NM	FT/MIN	425	531	637	743	849	955	1061	
5.24% (3.0°)	MIN:SEC	4:22	3:30	2:55	2:30	2:11	1:57	1:45	

ALTITUD MINIMA SEGUN DISTANCIA DME/ITGZ / MINIMUM ALTITUDE ACCORDING TO DISTANCE DME/ITGZ

NM	6	5	4	3	2
FT	3595 (2104)	3076 (1585)	2753 (1481)	2440 (849)	2121 (630)

A	B	C	D
CAT I COMPLETO/FULL	DA (DH) 1750 (259) - 3/4 (1200 M)		
LOC COMPLETO/FULL	MDA (MDH) 2100 (609) - 1 (1600 M)	1 3/4 (2800 M)	2 (3200 M)
CIRCLING	MDA (MDH) 2180 (689) - 1 (1600 M)	2180 (689) - 2 (3200 M)	2220 (729) - 2 1/4 (3600 M)
CNL SECTOR "W" RWY 14/32			